





# LONG PANEL CARRIAGE



# CHOOSE YOUR OPTIONS


SPECIFICATIONS	ThermoGuard™	ThermoSteel™	TS-138	Series 24
<b>U-Factor</b> R-Value	<b>0.14</b>  18.0	<b>0.22</b>  9.25	<b>0.26</b>  7.50	<b>0.38*</b>  7.0*
Foam/Insulate	Polyurethane	Polystyrene	Polystyrene	T-Bond/ Plain Steel
Thickness	2 inches	2 inches	1¾ inches	2 inches
Exterior Steel	27 gauge	25 gauge	27 gauge	24 gauge
Interior Steel	27 gauge	26 gauge	27 gauge	N/A
Warranty* <i>Excludes Springs</i>	Lifetime	Lifetime	25 years	Lifetime
<b>COLORS</b>				*With T-Bond
White	•	•	•	•
Almond	•		•	•
Sandtone	•	•	•	•
Tera-Bronze	•	•	•	•
Green	•		•	
Gray	•		•	
Coffee	•	•	•	•
Black	•	•	•	•
Light Oak	•	•	•	•
Dark Oak	•	•	•	•
Weathered Oak	•		•	
Rosewood		•		
Color Select™	•	•	•	•

\*For full warranty details contact your Midland dealer


\*\*ColorSelect™ uses Sherwin Williams Polane® Solar Reflective Polyurethane Enamel, providing a durable, heat-repelling coating.



## WINDOWS

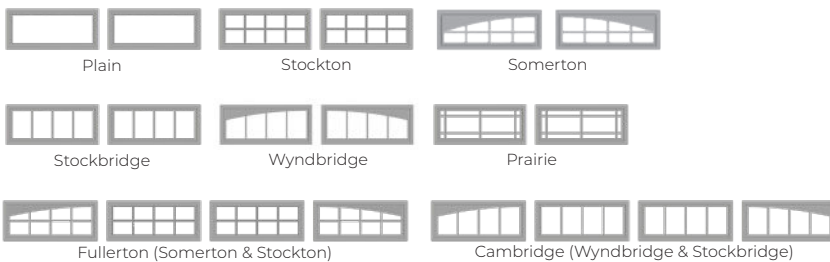

## HARDWARE

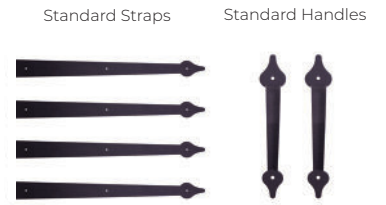

## COLORS



Color Select™

\*Printed colors may not be accurate. Contact your local Midland dealer for exact color samples

## GLASS



\*Tempered only. All other glass is available in both tempered and untempered.