

SHORT PANEL CARRIAGE



CHOOSE YOUR OPTIONS

INSULATION	ThermoGuard™	ThermoSteel™	TS-138	Series 24
Foam/Insulate	Polyurethane	Polystyrene	Polystyrene	Plain Steel/ T-Bond
R-Value	18.0	9.25	7.50	T-Bond: 7.0
U-Factor (Btu/hr/ft2/F)	0.14	0.22	0.26	0.38
Thickness	2 inches	2 inches	1¾ inches	2 inches
Exterior Steel	27 gauge	25 gauge	27 gauge	24 gauge
Interior Steel	27 gauge	26 gauge	27 gauge	N/A
Warranty* <i>Excludes Springs</i>	Lifetime	Lifetime	25 years	Lifetime

COLORS


White	•	•	•	•
Almond	•	•	•	•
Sandtone	•	•	•	•
Tera-Bronze	•	•	•	•
Green	•	•	•	•
Gray	•	•	•	•
Coffee	•	•	•	•
Black	•	•	•	•
Light Oak	•	•	•	•
Dark Oak	•	•	•	•
Weathered Oak	•	•	•	•
Rosewood	•	•	•	•
Color Select**	•	•	•	•

*For full warranty details contact your Midland dealer

**ColorSelect™ uses Sherwin Williams Polane® Solar Reflective Polyurethane Enamel, providing a durable, heat-repelling coating.




WINDOWS

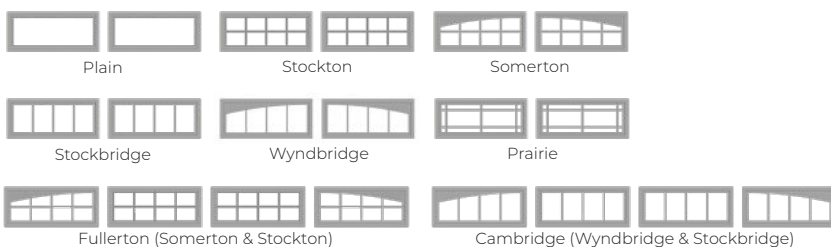

HARDWARE



COLORS

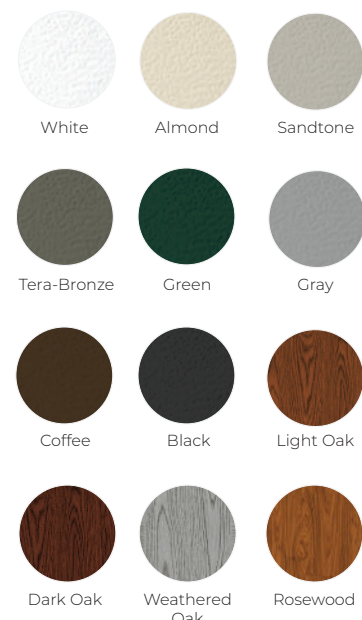

Color Select™

GLASS



*Tempered only. All other glass is available in both tempered and untempered.

MIDLAND™
GARAGE DOOR MFG CO

midlandgaragedoor.com • 800.437.4056

YOUR LOCAL GARAGE DOOR PROFESSIONAL