



COMMERCIAL ENERGYSAVER™




CHOOSE YOUR OPTIONS

SPECIFICATIONS	3-Inch EnergySaver™	2-Inch EnergySaver™
U-Factor R-Value	0.15 17.05 	0.22 9.25 
Foam/Insulate	Extruded closed-cell polystyrene	Polystyrene
Thickness	3 inches	2 inches
Maximum Width	40 ft. 2 In.	24 ft. 2 in.
Exterior Steel	25 gauge <i>20 gauge upgrade, white only</i>	25 gauge <i>20 gauge upgrade, white only</i>
Interior Steel	25 gauge	25 gauge
Warranty* <i>Excludes Springs</i>	10 years	10 years

*For full warranty details contact your Midland dealer




WINDOWS

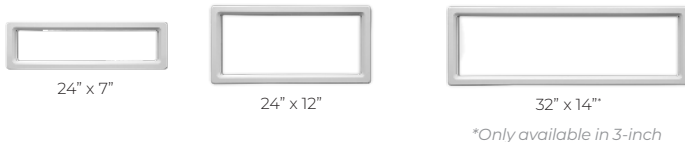

*Only available in 3-inch

TRACK MOUNTING




Reverse Angle Mounted Track
Continuous leg-in angle to attach to steel jambs




Angle Mounted Track
Continuous leg-out angle used on larger doors to attach to wood jambs


TRACK CONFIGURATIONS



Standard Lift
For normal installations



Inclined Track
To follow pitch of roof



Hi-Lift
To put horizontal track as close to ceiling as possible



Vertical Lift
Full vertical rise where headroom is available



Low Headroom
For low-clearance installations

COLORS



White



Sandtone



Tera-Bronze



Tera-Bronze



Coffee



Black



Color Select™

*ColorSelect™ uses Sherwin Williams Polane® Solar Reflective Polyurethane Enamel, providing a durable, heat-repelling coating.

GLASS



Plain



Obscure



Satin



Gray



Bronze



Low E



Double Dark

*Tempered only. All other glass is available in both tempered and untempered.